

EVEREST

EVEREST SEAT BAG

USER MANUAL



FURCHTLOS

INCLUDED

EVEREST Seat Bag
x1



Detachable shoulder strap
x1



Universal fixation straps
x2



CLOSING THE BAG

- 1 Roll the mouth of the bag at least three times for a watertight seal.



- 2 Fasten the buckles on either side of the bag. After fastening, pull the loose webbing ends to tighten the straps.



ASSEMBLY TO THE REAR SEAT



NOTE: Assembly process may vary slightly by motorcycle model. The user is responsible for selecting the appropriate assembly method for their own motorcycle and ensuring the bag is securely fastened before operating the vehicle.


- 1 Remove the pillion seat from the motorcycle.



- 2 Place the two universal fixation straps in the desired position under the seat, ensuring the width between the straps corresponds with the distance between the G hooks on the EVEREST Seat Bag. Adjust the length of the straps so the Hypalon loops extend beyond the edges of the seat and are accessible when the seat is returned to its original position on the bike.



NOTE: On certain motorcycle models it may also be possible to screw the straps directly into the fixation points on the motorcycle under the seat for a more secure fitment.

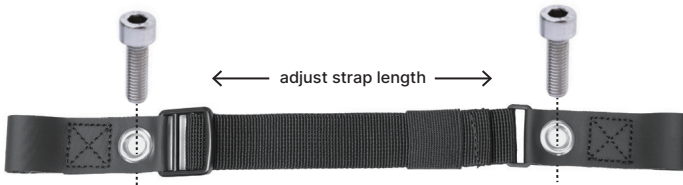

- F** Return the pillion seat back to its original position and place the EVEREST Seat Bag on top.



- L** Hook the 4 G-hooks on the EVEREST Seat Bag into the 4 hypalon loops on the universal fixation straps, then pull the loose webbing ends to tighten the straps. After tightening, the excess webbing length can be folded and tucked inside the elastic band.



⚠ WARNING! Ensure that all 4 straps are tightly secured, and the bag cannot move freely before each operation of the vehicle.

WARNINGS & GUIDELINES

WARNING!

Please read the user manual carefully and follow the recommended assembly method.

It's recommended to check that the bag is securely attached before each operation of the motorcycle.

Do not drive the motorcycle with a bag that is not fully closed, is not properly secured, or in any other condition that may affect the safe operation of the vehicle.

Ensure that no part of the bag, including the fixation straps or other accessories, has close contact with high temperature areas such as the exhaust pipe.

CLEANING & MAINTENANCE

To maintain a nice appearance, it's recommended to use silicone lubricant spray and a soft cloth to wipe the bags clean.

Do not use harsh cleaning agents, chemicals or high pressure cleaners.

When the surface material is exposed to direct sunlight for a long time or is affected by environmental factors (such as haze, acid rain, etc.), the color may fade or change.

If the product is contaminated with gasoline or similar substances it must be cleaned immediately!

FURCHTLOS does not assume any responsibility for product damage and color change caused by improper cleaning and maintenance!



CLEAN WITH A DAMP CLOTH OR
SOFT SPONGE



DO NOT PRESSURE WASH



CLEAN GASOLINE OR OTHER
SPILLS IMMEDIATELY!



DO NOT USE CHEMICALS OR HARSH
CLEANING AGENTS



VIDEO TUTORIAL



WARRANTY REGISTRATION



FOLLOW & TAG US
@FURCHTLOSMOTO

www.furchtlos-moto.com